

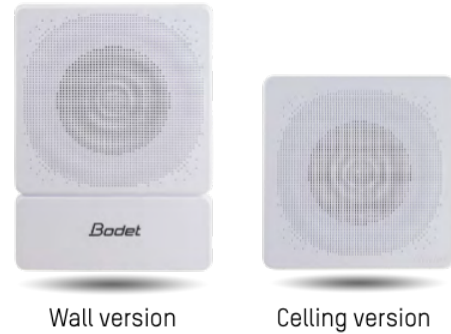
DESCRIPTION

- Sounder (for indoor) bells, melodies, voice calls and SEP* alarms.
- 3 operating modes:
 - Broadcast of melodies stored in the product. Control by Sigma master clock (the Ethernet network) or by manual command from the control box (ex: SEP alarm).
 - Voice calls: from microphone or sent from the computer.
 - Broadcast of streaming audio and/or music from the computer.
- The adjustment of the sound level is accomplished via the embedded web server (for all broadcasts).






*SEP: Safety Emergency Procedures.

STANDARDS

- Applicable standards: EN 60950 - EN 55022 - EN 55024 - EN 62311.



TECHNICAL FEATURES

- **Test**..... 1 button.
- **Power supply indicator**..... - Led ON (green) = device powered on: 
 - Led OFF = no power: 
- **Network indicator**..... - Led flashing green quickly = connection to the network in progress: 
 - Led flashing green slowly = device connected to the network: 
 - Led flashing red slowly = loss of network connection or failure to connect to the network: 
- **Audio files format**..... MP3.
- **Loudspeaker**..... 7 W.
- **Adjustable sound level**..... 90 db maximum [1 meter].
- **Supervision**..... SNMP v1 and v2c.

MECHANICAL FEATURES

- **Construction**..... White ABS casing M3 (IP31,IK07).
- **Operating temperature range**..... 0° to +50°C.

WALL VERSION

- **Dimensions of product**..... H230 x L163 x D80/50 mm.
- **Dimensions of mounting pattern**..... H168 x L90 mm.
- **Weight**..... 680 g.

CEILING VERSION

- **Dimensions of product**..... H174.8 x L174.8 x D67mm.
- **Dimensions of mounting pattern**..... Ø160 mm.
- **Weight**..... 608 g.

ELECTRICAL FEATURES

- **Power supply**..... PoE (Power over Ethernet).
- **Consumption max (Boost deactivated)**..... 13 W.
 - Default melodies and general call: 10W.

REFERENCES

- 907 710..... Wall sounder
- 907 720..... Ceiling sounder

